



ROHS

For reference only

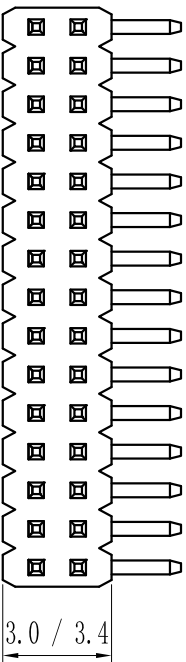


SQ
0.40
0.46

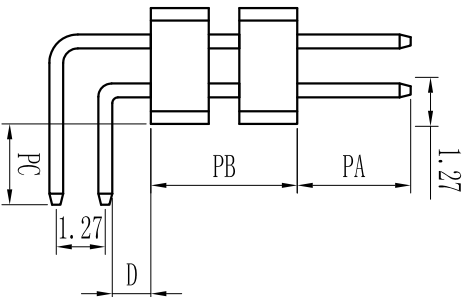


Height
H=0.65mm, 1.00mm, 1.50mm, 1.7mm, 2.0mm, 2.5mm

Specification:
Current Rating : 1AMP
Temperature Range : -40℃to+105℃
Contact Resistance : 20mΩ Max
Insulation Resistance : 1000MΩ Min
Withstanding Voltage : AC 500V
Material:
Insulator : Polyester (UL94V-0)
Standard: PBT/PA6T/LCP
Contact: Brass
Plating : Au or Sn Over 50u" Ni

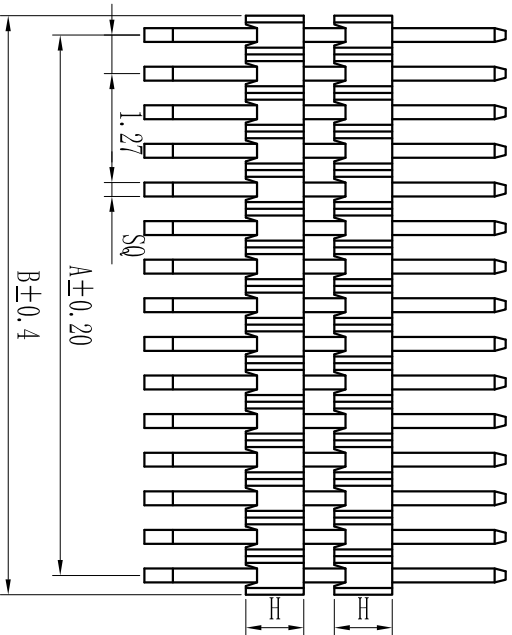

PCB LAYOUT

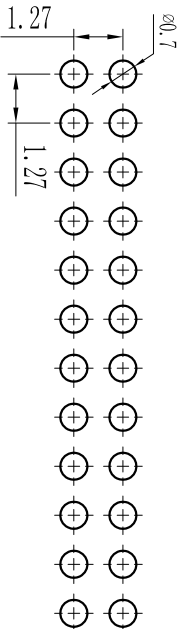

尺寸	尺寸
2x1	1.27
2x2	1.27
2x3	2.54
2x4	2.54
2x5	3.81
2x6	5.08
2x7	6.35
2x8	7.62
2x9	8.89
2x10	10.16
2x11	11.43
2x12	12.70
2x13	13.97
2x14	15.24
2x15	16.51
2x16	17.78
2x17	19.05
2x18	20.32
2x19	21.59
2x20	22.86
2x21	24.13
2x22	25.40
2x23	26.67
2x24	27.94
2x25	29.21
2x26	30.48
2x27	31.75
2x28	33.02
2x29	34.29
2x30	35.56
2x31	36.83
2x32	38.10
2x33	39.37
2x34	40.64
2x35	41.91
2x36	43.18
2x37	44.45
2x38	45.72
2x39	46.99
2x40	48.26
2x41	49.53
2x42	50.80
2x43	52.07
2x44	53.34
2x45	54.61
2x46	55.88
2x47	57.15
2x48	58.42
2x49	59.69
2x50	60.96
2x51	62.23
2x52	63.50



SHENZHEN UNICABLE CONNECTOR CO., LTD.

公司网址: WWW.SZLSTC.COM

公司邮箱: SZLSTC@126.COM

公司电话: 0755-23765650

公司传真: 0755-23765753

PART. NO: LSPH-0033

DWG. NO: ENDE0033

REV: A0 SHEET: 1/1

REVISION RECORD

DATE

SIZE: A4

DATE

1 2 3 4 5 6 7 8