


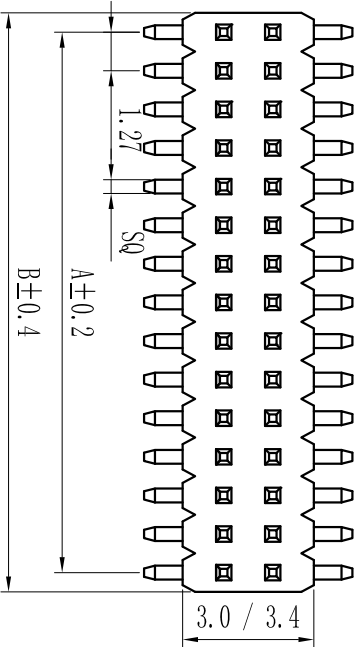


ROHS

A	尺寸	1.27
	2x1	-
	2x2	1.27 2.54
	2x3	2.54 3.81
	2x4	3.81 5.08
	2x5	5.08 6.35
	2x6	6.35 7.62
	2x7	7.62 8.89
	2x8	8.89 10.16
	2x9	10.16 11.43
	2x10	11.43 12.70
	2x11	12.70 13.97
	2x12	13.97 15.24
	2x13	15.24 16.51
	2x14	16.51 17.78
	2x15	17.78 19.05
B	2x16	19.05 20.32
	2x17	20.32 21.59
	2x18	21.59 22.86
	2x19	22.86 24.13
	2x20	24.13 25.40
	2x21	25.40 26.67
	2x22	26.67 27.94
	2x23	27.94 29.21
	2x24	29.21 30.48
	2x25	30.48 31.75
	2x26	31.75 33.02
	2x27	33.02 34.29
	2x28	34.29 35.56
	2x29	35.56 36.83
	2x30	36.83 38.10
C	2x31	38.10 39.37
	2x32	39.37 40.64
	2x33	40.64 41.91
	2x34	41.91 43.18
	2x35	43.18 44.45
	2x36	44.45 45.72
	2x37	45.72 46.99
	2x38	46.99 48.26
	2x39	48.26 49.53
	2x40	49.53 50.80
	2x41	50.80 52.07
	2x42	52.07 53.34
	2x43	53.34 54.61
	2x44	54.61 55.88
	2x45	55.88 57.15
D	2x46	57.15 58.42
	2x47	58.42 59.69
	2x48	59.69 60.96
	2x49	60.96 62.23
	2x50	62.23 63.50
	2x51	63.50 64.77
	2x52	64.77 66.04
	2x53	66.04 67.31
	2x54	67.31 68.58
	2x55	68.58 69.85
	2x56	69.85 71.12
	2x57	71.12 72.39
	2x58	72.39 73.66
	2x59	73.66 74.93
	2x60	74.93 76.20
E	2x61	76.20 77.47
	2x62	77.47 78.74
	2x63	78.74 80.01
	2x64	80.01 81.28
	2x65	81.28 82.55
	2x66	82.55 83.82
	2x67	83.82 85.09
	2x68	85.09 86.36
	2x69	86.36 87.63
	2x70	87.63 88.90
	2x71	88.90 90.17
	2x72	90.17 91.44
	2x73	91.44 92.71
	2x74	92.71 93.98
	2x75	93.98 95.25
F	2x76	95.25 96.52
	2x77	96.52 97.79
	2x78	97.79 99.06
	2x79	99.06 100.33
	2x80	100.33 101.60
	2x81	101.60 102.87
	2x82	102.87 104.14
	2x83	104.14 105.41
	2x84	105.41 106.68
	2x85	106.68 107.95
	2x86	107.95 109.22
	2x87	109.22 110.49
	2x88	110.49 111.76
	2x89	111.76 113.03
	2x90	113.03 114.30
G	2x91	114.30 115.57
	2x92	115.57 116.84
	2x93	116.84 118.11
	2x94	118.11 119.38
	2x95	119.38 120.65
	2x96	120.65 121.92
	2x97	121.92 123.19
	2x98	123.19 124.46
	2x99	124.46 125.73
	2x100	125.73 127.00
	2x101	127.00 128.27
	2x102	128.27 129.54
	2x103	129.54 130.81
	2x104	130.81 132.08
	2x105	132.08 133.35
H	2x106	133.35 134.62
	2x107	134.62 135.89
	2x108	135.89 137.16
	2x109	137.16 138.43
	2x110	138.43 139.70
	2x111	139.70 140.97
	2x112	140.97 142.24
	2x113	142.24 143.51
	2x114	143.51 144.78
	2x115	144.78 146.05
	2x116	146.05 147.32
	2x117	147.32 148.59
	2x118	148.59 149.86
	2x119	149.86 151.13
	2x120	151.13 152.40




SQ
0.40
0.46

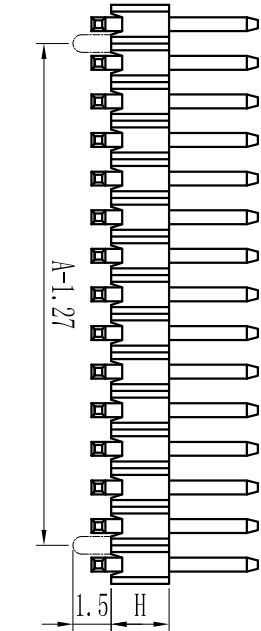

Height
H=0.65mm, 1.0MM, 1.5mm, 1.7mm, 2.0mm, 2.5mm

Insulator : Polyester (UL94V-0)
Standard:PA6T/LCP
Contact: Brass
Plating : Au or Sn Over 50u" Ni

2x1	38.10 39.37
2x2	39.37 40.64
2x3	40.64 41.91
2x4	41.91 43.18
2x5	43.18 44.45
2x6	44.45 45.72
2x7	45.72 46.99
2x8	46.99 48.26
2x9	48.26 49.53
2x10	49.53 50.80
2x11	50.80 52.07
2x12	52.07 53.34
2x13	53.34 54.61
2x14	54.61 55.88
2x15	55.88 57.15
2x16	57.15 58.42
2x17	58.42 59.69
2x18	59.69 60.96
2x19	60.96 62.23
2x20	62.23 63.50

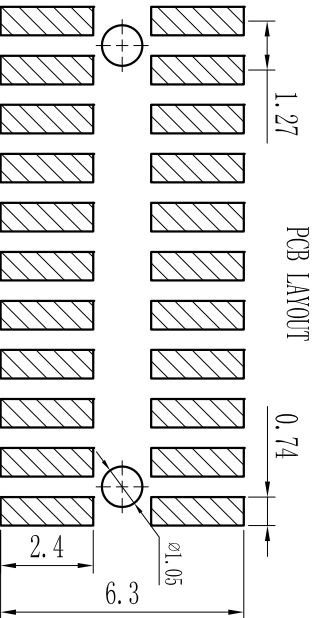

For reference only

Specification:

Current Rating : 1AMP
Temperature Range : -40°Cto+105°C
Contact Resistance : 20mΩ Max
Insulation Resistance : 1000MΩ Min
Withstanding Voltage : AC 500V
Material :

IS 深圳市联索连接器有限公司
SHENZHEN UNICABLE CONNECTOR CO., LTD.
公司网址WWW.SZLSTC.CN 公司电话0755-23765650
公司邮箱SZLSTC@126.COM 公司传真0755-23765753

TITLE: Pitch1.27mm Pin Header,Single Plastic,
Dual Row, SMT Type

PART. NO: LSPH-0030

DWG. NO:

ENDE0030

REV: A0 SHEET: 1/1