
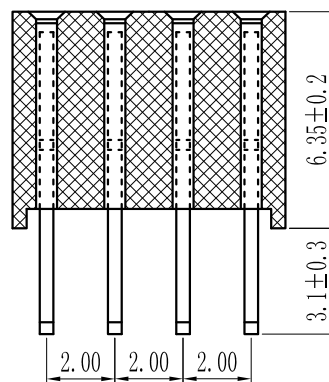
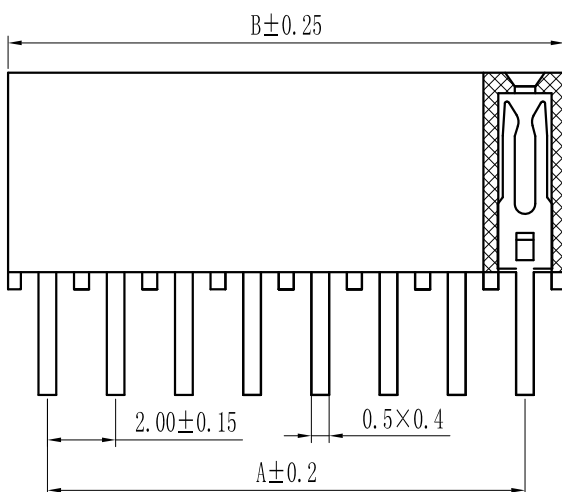


ROHS

For reference only

A

Pin数	尺寸A	尺寸B
4×2	2.0	4.5
4×3	4.0	6.5
4×4	6.0	8.5
4×5	8.0	10.5
4×6	10.0	12.5
4×7	12.0	14.5
4×8	14.0	16.5
4×9	16.0	18.5
4×10	18.0	20.5
4×11	20.0	22.5
4×12	22.0	24.5
4×13	24.0	26.5
4×14	26.0	28.5
4×15	28.0	30.5
4×16	30.0	32.5
4×17	32.0	34.5
4×18	34.0	36.5
4×19	36.0	38.5
4×20	38.0	40.5
4×21	40.0	42.5
4×22	42.0	44.5
4×23	44.0	46.5
4×24	46.0	48.5
4×25	48.0	50.5
4×26	50.0	52.5
4×27	52.0	54.5
4×28	54.0	56.5
4×29	56.0	58.5
4×30	58.0	60.5
4×31	60.0	62.5
4×32	62.0	64.5
4×33	64.0	66.5
4×34	66.0	68.5
4×35	68.0	70.5
4×36	70.0	72.5
4×37	72.0	74.5
4×38	74.0	76.5
4×39	76.0	78.5
4×40	78.0	80.5

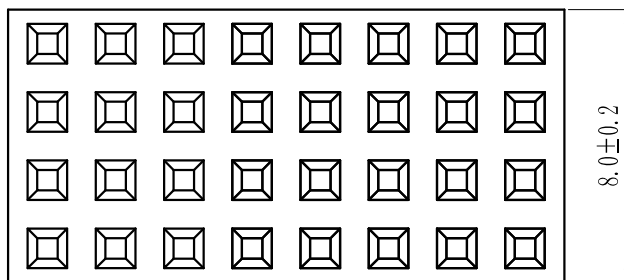

Specification:

Current Rating : 1.5AMP

Temperature Range : -40°C to +105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000M Ω Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PBT/PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni

D

E

F

G

H

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 深圳市联索连接器有限公司 SHENZHEN UNICABLE CONNECTOR CO., LTD. 公司网址WWW.SZLSTC.CN 公司电话0755-23765650 公司邮箱SZLSTC@126.COM 公司传真0755-23765753	PART. NO: LSFH-0098	
				LINEAR	ANGLES	APPROVED				DWG. NO: ENDE1098	
				0.0±0.25	X° REF±6°	DESIGNER				REV: A0	SHEET: 1/1
			UNIT: MM	0.00±0.15	X° ±3°						
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN				TITLE: Pitch2.0mm Female Header, Quad Row, Plastic Height 6.35mm, DIP(Y)	