

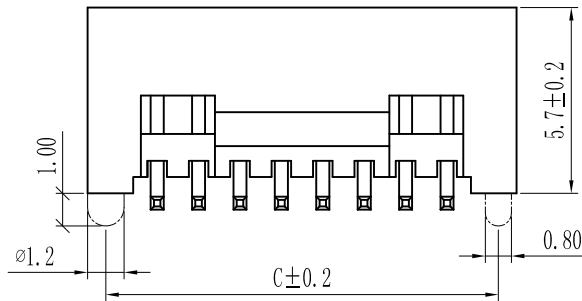




ROHS

For reference only

Pin数	尺寸A	尺寸B	尺寸C
2×5	5.08	9.55	16.33
2×6	6.35	10.82	17.60
2×7	7.62	12.09	18.87
2×8	8.89	13.36	20.14
2×9	10.16	14.63	21.41
2×10	11.43	15.90	22.68
2×11	12.70	17.17	23.95
2×12	13.97	18.44	25.22
2×13	15.24	19.71	26.49
2×14	16.51	20.98	27.76
2×15	17.78	22.25	29.03
2×16	19.05	23.52	30.30
2×17	20.32	24.79	31.57
2×18	21.59	26.06	32.84
2×19	22.86	27.33	34.11
2×20	24.13	28.60	35.38
2×21	25.40	29.87	36.65
2×22	26.67	31.14	37.92
2×23	27.94	32.41	39.19
2×24	29.21	33.68	40.46
2×25	30.48	34.95	41.73
2×26	31.75	36.22	43.00
2×27	33.02	37.49	44.27
2×28	34.29	38.76	45.54
2×29	35.56	40.03	46.81
2×30	36.83	41.30	48.08
2×31	38.10	42.57	49.35
2×32	39.37	43.84	50.62
2×33	40.64	45.11	51.89
2×34	41.91	46.38	53.16
2×35	43.18	47.65	54.43
2×36	44.45	48.92	55.70
2×37	45.72	50.19	56.97
2×38	46.99	51.46	58.24
2×39	48.26	52.73	59.51
2×40	49.53	54.00	60.78
2×41	50.80	55.27	62.05
2×42	52.07	56.54	63.32
2×43	53.34	57.81	64.59
2×44	54.61	59.08	65.86
2×45	55.88	60.35	67.13
2×46	57.15	61.62	68.40
2×47	58.42	62.89	69.67
2×48	59.69	64.16	70.94
2×49	60.96	65.43	72.21
2×50	62.23	66.70	73.48

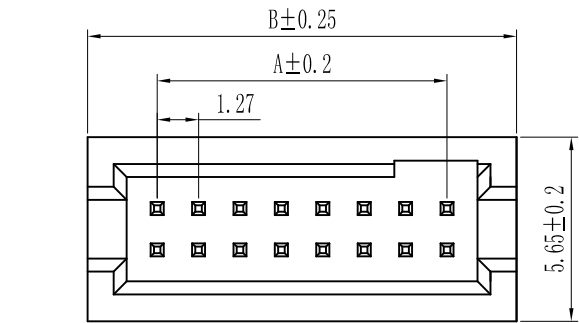

PCB LAYOUT

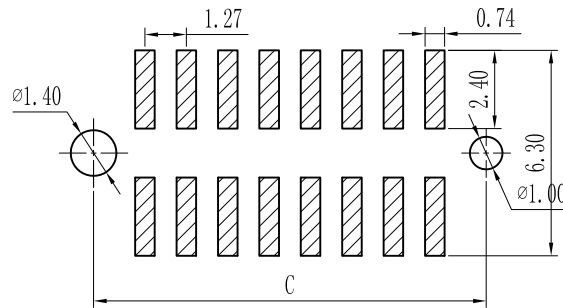

Specification:

Current Rating : 1AMP

Temperature Range : -40℃to+105℃

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni



GENERAL TOLERANCES

LINEAR

ANGLES

0.0±0.25

X° REF±6°

0.00±0.15

X° ±3°

0.000±0.08

X° X'±2°

SCALE:

1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

公司网址WWW.SZLSTC.CN
公司邮箱SZLSTC@126.COM公司电话0755-23765650
公司传真0755-23765753

PART. NO:

LSBH-0008

DWG. NO:

ENDE2008

REV:

AO

SHEET: 1/1

1

2

3

4

5

6

7

8